


详细零部件&组装步骤

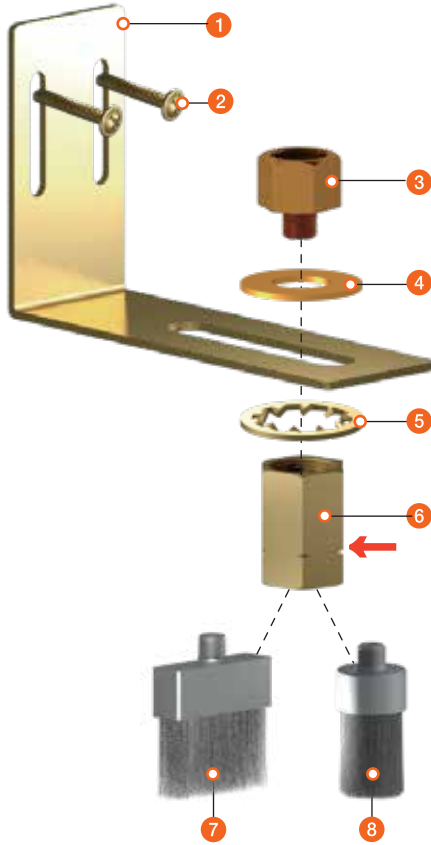

| LIST | PART No. | DESCRIPTION | Q'TY |
|------|----------|---|------|
| ① | B003 | Oil Brush Bracket, "L" Shape, Steel | 1 |
| ② | B051 | Self Drilling Screw, #8 x 19, Steel | 2 |
| ③ | A005 | Reducer, PT1/4" F x PT1/8" M Adaptor, Brass | 1 |
| ④ | B057 | Washer, Ø25 x Ø10.5 x 1.5t, Steel | 1 |
| ⑤ | B058 | Tooth Washer, O.D.23mm x I.D.14.5mm x 1t, Steel | 1 |
| ⑥ | C012 | Socket, PT1/8" F x NPT1/8" F, Brass | 1 |
| ⑦ | C013 | Oil Brush, 2" Flat Stainless Steel, NPT1/8" M | 1 |
| ⑧ | C014 | Oil Brush, 1" Round Stainless Steel, NPT1/8" M | 1 |

组装步骤

1. 安装油刷支架 (①) 使用自攻螺丝钉固定在合适的位置 (②).
2. 固定接头 (③), 垫圈 (④), 牙垫圈 (⑤), 螺母 (⑥), 根据适当油刷 (⑦) 或 (⑧) 把 Pulsarlube EO 装备沿着支架槽安装在所需位置. 确保套管如图安装. 套管线必须要朝下, 因另一端要连接NPT接口的油刷. 套管的另一端为PT接口.

注释

1. 使用PTFE 胶带缠绕油刷孔 (⑦) 或 (⑧).
2. 排量因油粘度, 环境或温度等有所不同.

| LIST & PART No. | KIT No. | DESCRIPTION |
|----------------------|-------------|--|
| [① ~ ⑥] + ⑦ (C013) | C038 | [EO] Stainless Steel Flat Oil Brush & Bracket Kit |
| [① ~ ⑥] + ⑧ (C014) | C039 | [EO] Stainless Steel Round Oil Brush & Bracket Kit |